



EVX series EVX 12260



Valve Regulated Lead Acid Battery

Maintenance-Free Sealed Lead Acid Battery.
Absorbent Glass Mat (AGM) technology for efficient gas recombination of up to 99%.

General Design for Cyclic Applications

【Design Life】

400 cycles @ 100%DOD at 25°C
1800 cycles @ 30%DOD at 25°C

【Operating Temperature Range】

Nominal Operating Temperature : 25°C (77°F)
Discharge : -15°C ~ 50°C (5°F~122°F)
Charge: -15°C ~ 40°C (5°F~104°F)
Storage: -15°C ~ 40°C (5°F~104°F)

【Certification】

IEC 60254-1:2005 / IEC60254-2:2008

【Equalization Charging Voltage】


14.4 ~ 15.0 VDC/Unit at 25°C (77°F)

【Self Discharge】

Less than 10% after 90 days, can be stored up to 6 months at 25°C (77°F);
Fully recharging is required before usage, and charged sooner if stored at higher temperature than 25°C (77°F).

Specification

Nominal Voltage	12V (6 cells per unit)		
Nominal Capacity	26 AH @20HR-rate to 1.75V per cell@25°C (77°F)		
Weight	Approx. 8.65 Kg (19.06 lbs)		
Maximum Discharge Current	350A (5sec)		
Internal Resistance	Approx. 9.6 mΩ		
Short Circuit Current	--		
Maximum Charge Current	7.80A		
Terminal types	I1 terminal to accept M5 bolt		
Terminal tightening torque	30.4±6.1 Kgf·cm / 26.4±5.3 Lbf·in / 3.0±0.6 N·m		
Container Material	ABS (UL 94-HB)		
Dimensions	Length (L)	166.0±2.0 mm	6.54±0.08 inch
	Width (W)	175.0±2.0 mm	6.89±0.08 inch
	Container Height (h)	125.0±1.5 mm	4.92±0.06 inch
	Overall Height (H)	125.0±1.5 mm	4.92±0.06 inch

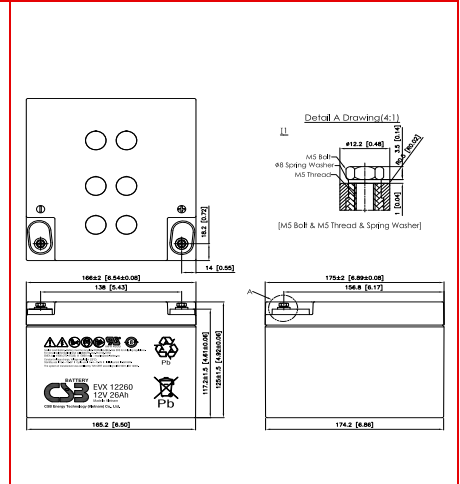

Constant Current Discharge Characteristics Unit: A (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	27.3	20.3	16.5	11.8	9.54	7.03	5.66	4.68	4.03	3.18	2.63	1.44
1.67V	26.5	19.7	16.0	11.4	9.22	6.82	5.49	4.56	3.92	3.09	2.56	1.41
1.70V	25.7	19.1	15.5	11.1	8.97	6.59	5.32	4.43	3.81	3.00	2.48	1.37
1.75V	24.9	18.5	15.0	10.8	8.68	6.39	5.16	4.30	3.70	2.91	2.40	1.33
1.80V	24.1	18.0	14.6	10.4	8.41	6.19	5.00	4.16	3.57	2.81	2.32	1.28
1.85V	23.3	17.4	14.1	10.1	8.13	5.99	4.84	4.03	3.46	2.72	2.24	1.24

Constant Power Discharge Characteristics Unit: W (25°C, 77°F)

F.V/Time	30MIN	45MIN	60MIN	90MIN	2HR	3HR	4HR	5HR	6HR	8HR	10HR	20HR
1.60V	328	244	198	141	114	84.3	67.9	56.2	48.4	38.2	31.5	17.3
1.67V	318	237	192	137	111	81.4	65.7	54.6	47.0	37.2	30.6	16.9
1.70V	308	229	186	133	107	79.1	63.8	53.2	45.7	36.0	29.7	16.4
1.75V	299	223	181	129	104	76.7	61.9	51.6	44.3	34.9	28.8	15.9
1.80V	289	216	175	125	101	74.3	60.0	49.9	42.9	33.7	27.8	15.4
1.85V	280	209	170	121	97.1	71.9	58.1	48.3	41.5	32.6	26.9	14.9

Please refer to the official site for the latest rating confirmation. URL: www.csb-battery.com

Issued: 210217

Sales Offices

希世比能源科技股份有限公司
CSB Energy Technology Co., Ltd.

BUSINESS HEADQUARTERS

Tel: +886-2-2880-5600
Fax: +886-2-2888-3300

USA OFFICE

Tel: +1-817-244-7777 / 1-(800)3-CSB-USA (272872)
Fax: +1-817-244-4445

SHENZHEN OFFICE (CHINA)

Tel: +86-755-8831-6488/6775/6075
Fax: +86-755-8831-6548

EUROPE (EMEA) OFFICE

Tel: +31(0)180-418-140
Fax: +31(0)180-418-327

SHANGHAI OFFICE (CHINA)

Tel: +86-21-5046-1622/0833/0094
Fax: +86-21-5046-1046

Recognized under UL 1989,
and certified by ISO 9001, 14001, 45001, 50001.



TAIPEI OFFICE

Tel: +886-2-2880-5600
Fax: +866-2-2888-3300

BEIJING OFFICE (CHINA)

Tel: +86-10-6597-8065/8165/8265
Fax: +86-10-6597-8565